


## ADGO54S17/1-24

## ADVANTAGE GOLIATH 54S17

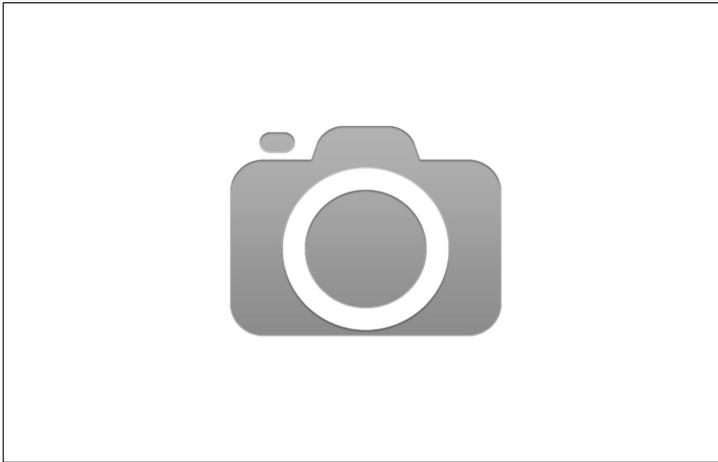

- **Narrow monocoque body**
- **Sprung drawbar**
- **Wheels 650/75R32**
- **Hydraulic brakes**
- **Ø 900 mm vertical beaters with Hardox knives**
- **Guillotine door**
- **Hydraulic installation**
- **DPA (proportional flow) on Ferti-CONTROL 4000 control box**

### Standard equipment

- ✓ Monocoque body with monoblock rounded side walls
- ✓ Manufactured according to EN 690 standard
- ✓ 2 vertical beaters with removable coupling and balanced spirals (Ø 900 mm) with retractable hammers on wear rings (spiral thickness: 10 mm)
- ✓ Reversible, interchangeable HARDOX blades (thickness: 10 mm)
- ✓ 1,000-rpm drive shaft - beater rotation speed: 430 rpm
- ✓ Bolted rectangular moving floor slats (80 x 40 mm)
- ✓ Hydraulic tensioning of the moving floor with under-tension security and RE mode locking
- ✓ Moving floor drive via tractor hydraulics, manual flow adjustment
- ✓ Reinforced single-speed reduction gearbox of moving floor
- ✓ Mechanically welded steel gearwheels
- ✓ Protected P.T.O. and drive shaft
- ✓ Homocinetic transmission (cam security)
- ✓ Free wheel on the spreading system
- ✓ Reversing camera with 7" LCD colour screen
- ✓ Anti-projection front cover
- ✓ Galvanised side boards
- ✓ Sealing flap at the front and on the spreading table
- ✓ LED flash bar connected to lighting
- ✓ Removable mudguards
- ✓ Dual-line air brakes
- ✓ Sprung drawbar
- ✓ Ø 50 mm bolted flat eyelet
- ✓ Hydraulic parking stand
- ✓ Moving floor with 2 shipping chains (Ø 16 mm links - 32 t per link)

### Specific equipment ADGO54S17/1-24

- L-GO54S17-24 GOLIATH 54S17 muck spreader
- **3508** Wheels 650/75R32 (MITAS) AC70G 172 A8 (Ø 1,795 x 650 mm, 3,245 kg per wheel at 40 km/h and 0.6 bar and 11,365 kg per wheel at 40 km/h and 4 bar) instead of 400R22.5
- **315** Hydraulic brakes instead of air brakes on single-axle model
- **L932176** Guillotine door for 54S17 and 62S19
- **5784** Beaters with spoon knives (1 knife on 2) instead of standard beaters
- **5785** Revolution counter for the moving floor shaft
- **3666** Independent industrial hydraulic installation (including hydraulic filter and Ferti-CONTROL 4000)
- **3732** DPA on Ferti-CONTROL 4000 allowing the regulation of the floor speed according to the driving speed - including display of the driving speed (M/min). Allows also the regulation of the speed of the floor depending on the door opening (in combination with ref. 3116 to be taken additionally).  
WARNING:  
- on HORIZON model: ref. 3116 compulsory;  
- Ferti-CONTROL 4000 compulsory.
- **3116** Electronic door opening indicator, spreader counter and moving floor starting safety (according to the door opening) - guillotine door compulsory)
- **3663** Extra cost for low flow electro-hydraulic functions (only available on muck spreaders and DRAKKAR) - per function

|              | Total €  | Discount % | NET   |
|--------------|----------|------------|-------|
| RETAIL       | 68.101 € | .....      | ..... |
| <b>TOTAL</b> |          |            | ..... |