




ADHVS51S12/3-24

ADVANTAGE HVS 51S12

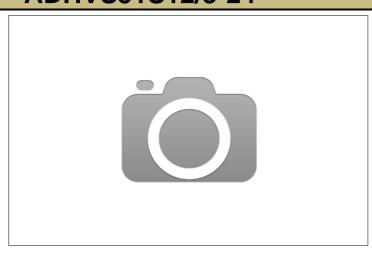

- Monocoque, monoblock body
- Wheels 620/75R26
- Full axle
- Hydraulic brakes
- Ø 900 mm beaters
- Guillotine door
- HARDOX blades
- Hydraulic installation

Standard equipment

- ✓ Monocogue and monoblock body with a fold over the whole length
- Moving floor drive by tractor hydraulics, manual adjustment of the flow
- √ Reversible and interchangeable HARDOX blades (thickness: 8 mm)
- Moulded gearwheel
- √ Homocinetic P.T.O.-shaft with cam limiter
- √ Free wheel on the spreading system
- ✓ Anti-projection front cover
- √ Protected lighting with manual folding on tubes with springs
- √ LED flash bar connected on lighting.
- √ Galvanized side boards
- √ Sealing flap at the front and on the spreading table

- √ Ladder (EN 690)
- √ Hydraulic brakes with pre-equipment for air brakes
- √ Sprung drawbar
- Hydraulic stand
- ✓ Certification 2020
- 2 vertical beaters with regular spirals (Ø 900 mm) with removable blades (spiral thickness: 10 mm in ST 420 reinforced steel)
- ✓ Interchangeable beater stand on wear ring
- √ 1.000 rpm drive shaft beater rotation speed: 430 rpm
- √ Moving floor with 2 shipping chains (Ø 14 mm 25 T per link)
- Rectangular slats of moving floor (80 x 40)

Specific equipment ADHVS51S12/3-24

L-HVS51S12-24 HVS 51S12 muck spreader

KHFR Machine subject to French national certification

3633 Wheels 620/75R26 (ALLIANCE) A360 167 A8 (Ø 1.590 x 625 mm, 5.450 kg per wheel at 40 km/h

and 3,2 bar) instead of 400R22.5

Hydraulic brakes instead of air brakes on single-axle model

L932015 Guillotine door from 37S08 to 51S12

• 5784 Beaters with spoon knives (1 knife on 2) instead of standard beaters

5271 Independent industrial hydraulic installation (including hydraulic filter and Ferti-CONTROL 500)

3663 Extra cost for low flow electro-hydraulic functions (only available on muck spreaders and

DRAKKAR) - per function

	Total €	Discount %	NET
RETAIL	50 480 €		
		TOTAL	

V 27-01-2025