






## ADVANTAGE HVS 37S08

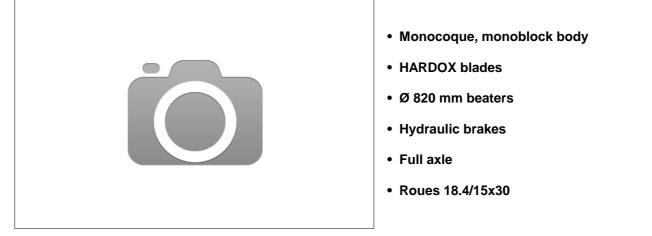

## **Standard equipment**

- Monocoque and monoblock body with a fold over the whole length  $\checkmark$ Moving floor drive by tractor hydraulics, manual adjustment of the 1 flow
- Reversible and interchangeable HARDOX blades (thickness: 8 mm)
- Moulded gearwheel
- Homocinetic P.T.O.-shaft with cam limiter  $\checkmark$
- Free wheel on the spreading system  $\checkmark$
- 1 Anti-projection front cover
- Protected lighting with manual folding on tubes with springs
- LED flash bar connected on lighting  $\sqrt{}$
- Galvanized side boards  $\sqrt{}$

 $\checkmark$ Sealing flap at the front and on the spreading table

Ladder (EN 690)

1

- Hydraulic brakes with pre-equipment for air brakes
- $\checkmark$ Sprung drawbar
  - Hydraulic stand
  - Certification 2020
- 2 vertical beaters with regular spirals (Ø 820 mm) with removable 7 blades (spiral thickness: 10 mm in ST 420 reinforced steel)
- 1.000 rpm drive shaft beater rotation speed: 420 rpm
  - Moving floor with 2 shipping chains (Ø 12 mm 18 T per link)
- Tubular slats of moving floor (60 x 30)

## Specific equipment ADHVS37S08/1-22

- L-HVS37S08 HVS 37S08 muck spreader
- Wheels 18.4/15x30 14 PR (ALLIANCE) A324 (Ø 1.550 x 467 mm, 4.260 kg per wheel at 40 km/h 5502 and 3,2 bar) instead of 400R22.5

	Total €	Discount %	NET
RETAIL	34 020 €		
TOTAL			