


ADHVS37S08/2-22

ADVANTAGE HVS 37S08

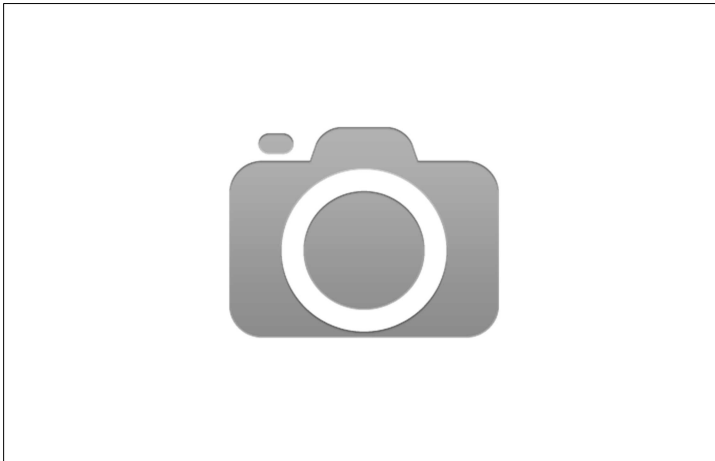

- Monocoque, monoblock body
- HARDOX blades
- Ø 820 mm beaters
- Hydraulic brakes
- Full axle
- Roues 18.4/15x30
- Guillotine door

Standard equipment

- ✓ Monocoque and monoblock body with a fold over the whole length
- ✓ Moving floor drive by tractor hydraulics, manual adjustment of the flow
- ✓ Reversible and interchangeable HARDOX blades (thickness: 8 mm)
- ✓ Moulded gearwheel
- ✓ Homocinetic P.T.O.-shaft with cam limiter
- ✓ Free wheel on the spreading system
- ✓ Anti-projection front cover
- ✓ Protected lighting with manual folding on tubes with springs
- ✓ LED flash bar connected on lighting
- ✓ Galvanized side boards
- ✓ Sealing flap at the front and on the spreading table
- ✓ Ladder (EN 690)
- ✓ Hydraulic brakes with pre-equipment for air brakes
- ✓ Sprung drawbar
- ✓ Hydraulic stand
- ✓ Certification 2020
- ✓ 2 vertical beaters with regular spirals (Ø 820 mm) with removable blades (spiral thickness: 10 mm in ST 420 reinforced steel)
- ✓ 1.000 rpm drive shaft - beater rotation speed: 420 rpm
- ✓ Moving floor with 2 shipping chains (Ø 12 mm - 18 T per link)
- ✓ Tubular slats of moving floor (60 x 30)

Specific equipment ADHVS37S08/2-22

- L-HVS37S08 HVS 37S08 muck spreader
- 5502 Wheels 18.4/15x30 14 PR (ALLIANCE) A324 (Ø 1.550 x 467 mm, 4.260 kg per wheel at 40 km/h and 3,2 bar) instead of 400R22.5
- L932015 Guillotine door from 37S08 to 51S12

	Total €	Discount %	NET
RETAIL	36 815 €
TOTAL		