

leboulch



www.leboulch.com






HVS

evolution

ALL-TERRAIN MOUNTAIN-TYPE MUCK SPREADER




Leboulch, experience and sturdiness for a well done job!

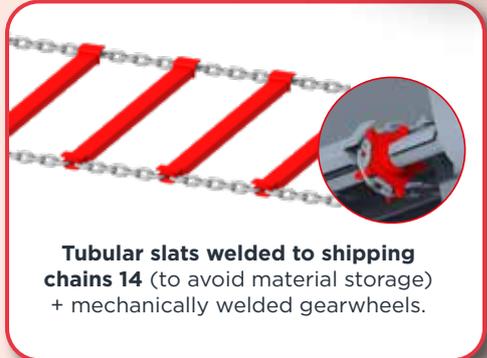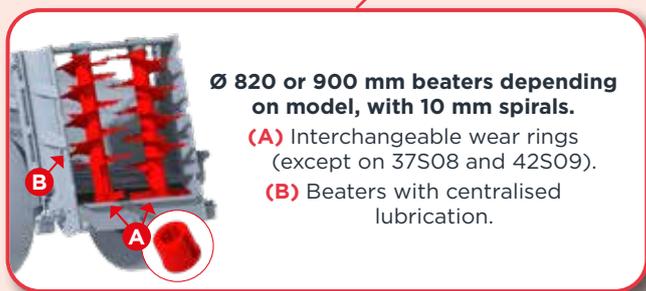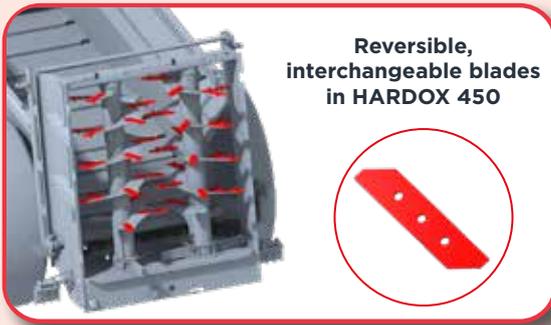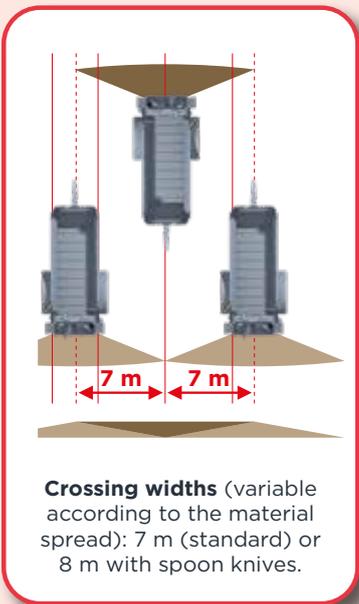



Guillotine door (standard pre-equipment)

170 or 191 cm depending on the model

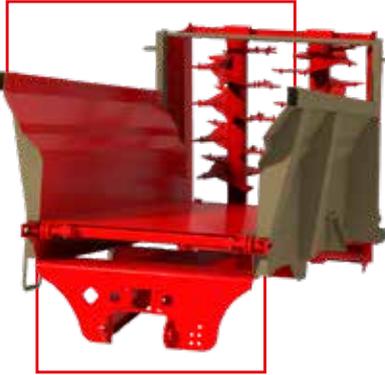

130 or 150 cm depending on the model

Monoblock, tapered body with one-piece side sheets for easy unloading of the goods.



Ferti-CONTROL 320



Easy-CONTROL (simplified DPA)



ISO-CONTROL (precision DPA)

DPA (proportional flow): automatic regulation of the moving floor speed according to the door opening and driving speed.

Headboard with self-cleaning grate.



Document tube with individualised spare parts book.



(A)

(B)

Choice of eyelets

(A) Bolted Ø50 mm (standard)

(B) Bolted knee-joint (option)



Drive line with transmission under the lowered axle (ideal for sloping terrain).
Wear rings on rear bearings. Free wheel clutch on rear universal joint. Sealing flaps at the front and on the spreading table.






HVS evolution

- ✓ Single axle from 7.8 to 17.44 m³
- ✓ Lowered body for excellent stability and grip on slopes
- ✓ Balanced Leboulch beaters with spirals
- ✓ Removable blades

FOR SMALL AND MEDIUM-SIZED BUSINESSES

The dimensions below are given in meters (m).

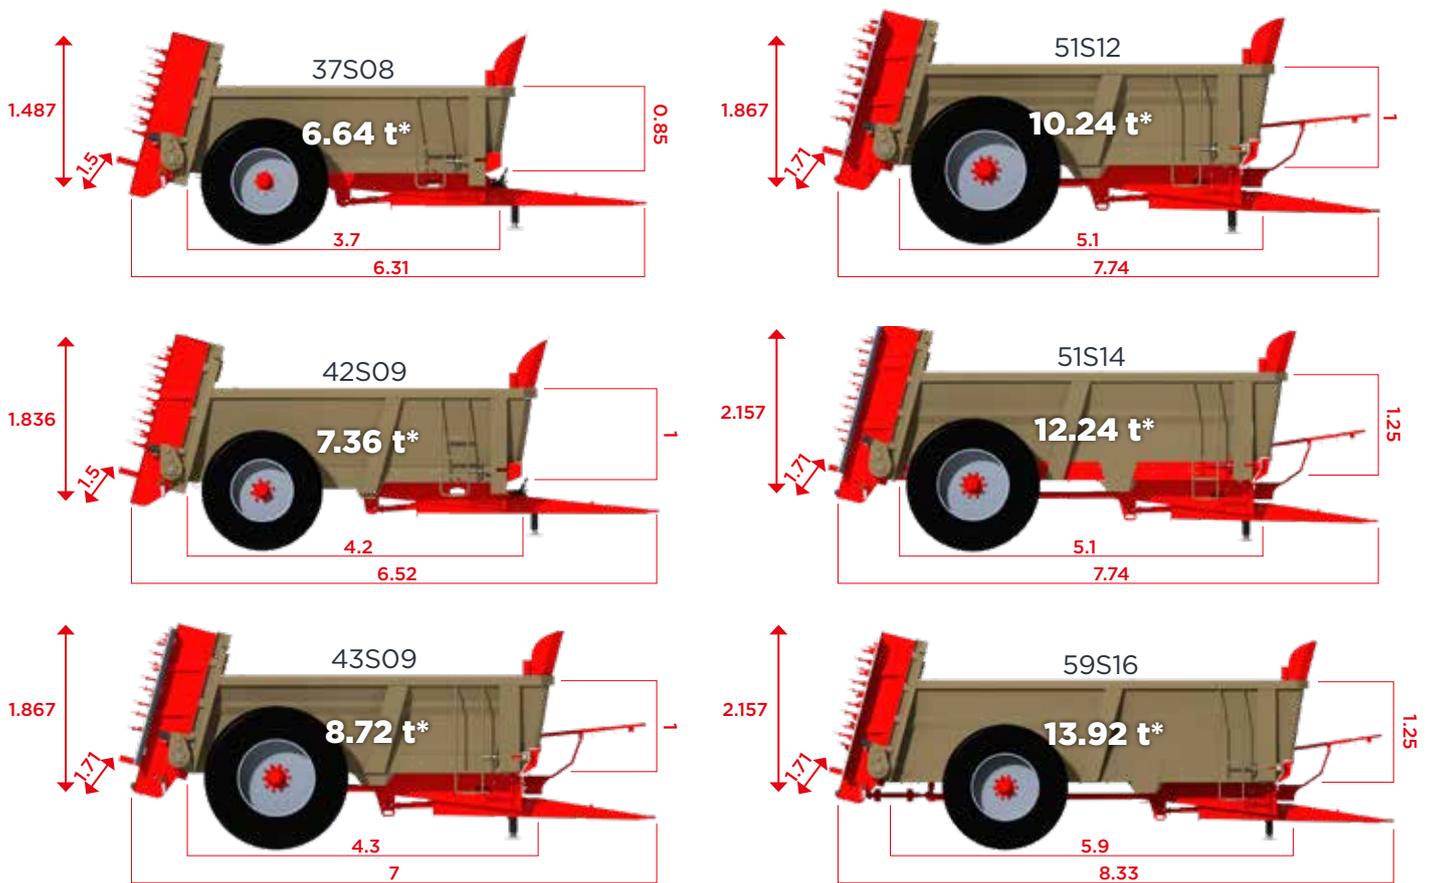

*Capacity (in t) for manure with a density of 0.8 t/m³.

Excellent price-quality ratio!



JLB leboulch

Route de Guernanville, 27330 La Vieille-Lyre (France)

Tel.: +33 2 32 30 67 47

E-Mail: info@leboulch.com

www.leboulch.com

