

# COMPLETE RANGE AND PROFESSIONAL SERVICE



**A Century of Experience at Your Service!  
Now in France and Worldwide with CE Certification!**


# GOLD<sub>2</sub>




**Folding aluminium ladder, galvanised side mudguards and pre-equipment for optional equipment** (side bumper and thermoplastic mudguards).



**Document tube** with individualised parts book and user manual.



**Sturdy 300 x 100 x 10 mm tubular chassis stringer** for the entire range, except for 4700S, 5300S and 5300D (300 x 100 x 8 mm).




**Choice of eyelets**  
**(A)** Bolted Ø 50 mm (standard)  
**(B)** Bolted knee-joint (option)




**Hydraulic folding parking stand** attached directly to the trailer chassis to free the drawbar and facilitate turning.




**Noise-reducing silentblock** for centering and lateral locking of the body on the chassis.

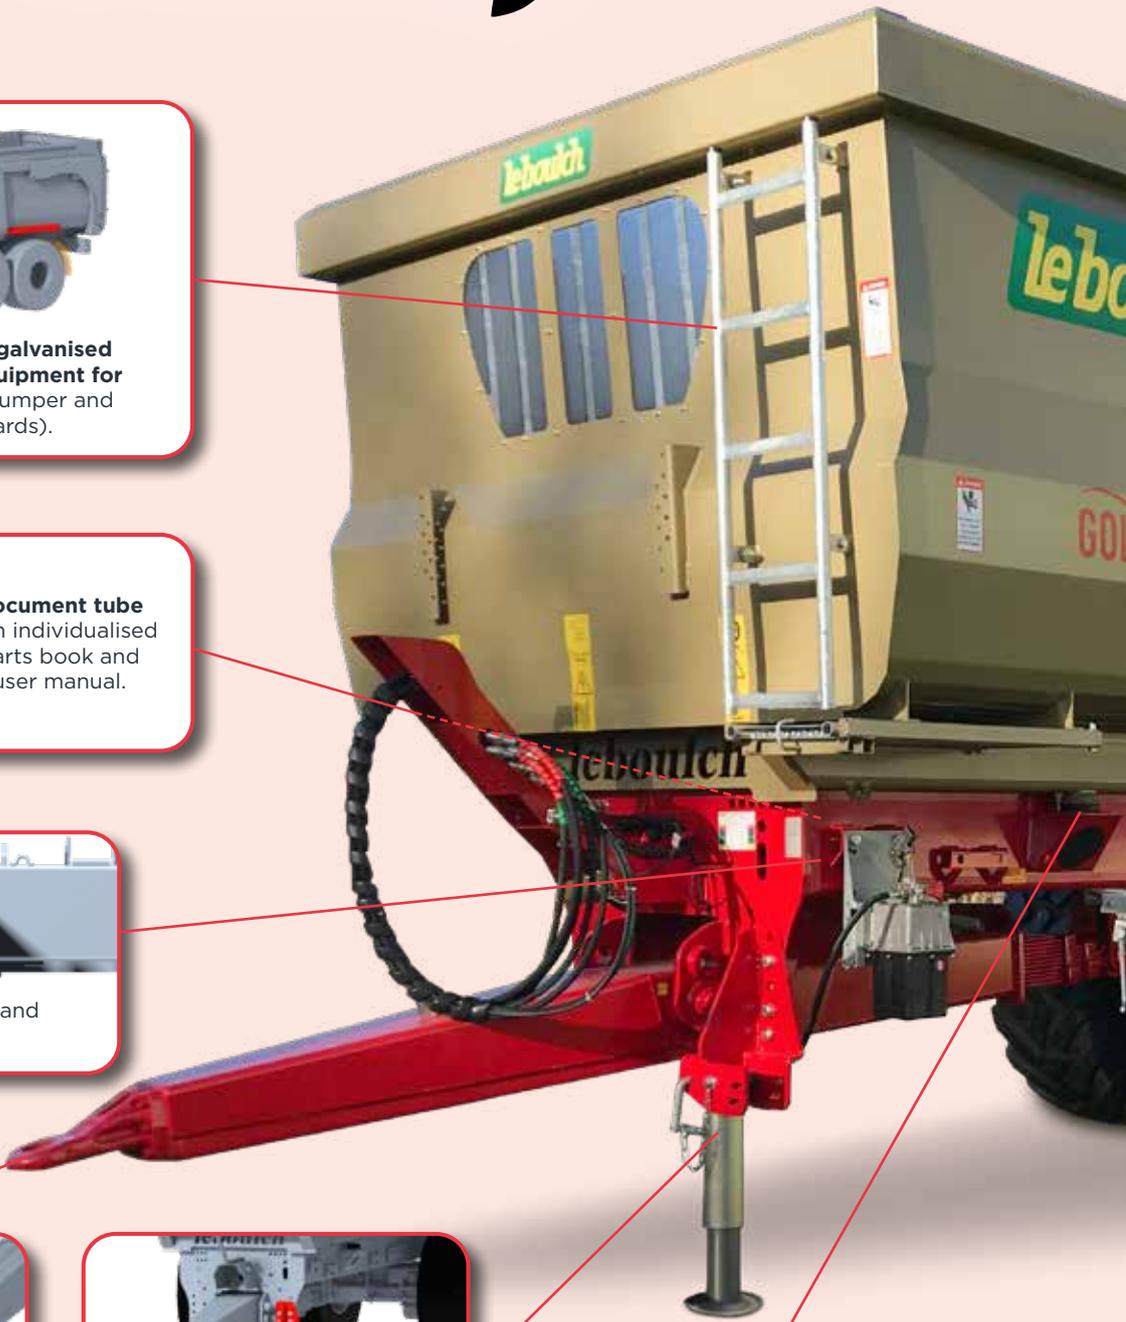




**Tapered body** (2.25 m at the front and 2.3 m at the rear), wider at the bottom than at the top to facilitate unloading.

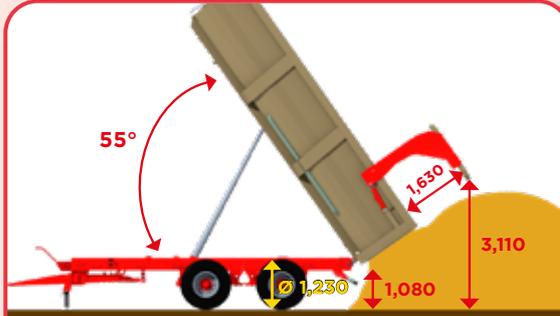

**High-clearance rear door with hydraulic opening** for easy unloading of silage with extensions and to avoid scraping the pile when tipping at the highest.

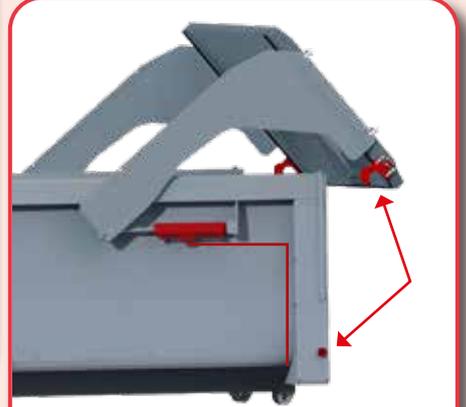


**Door opening cylinders** protected by the door arms and upper body edge strip.

**Double door closing safety system:** hydraulic with check valve and mechanical with 2 adjustable hooks. Hydraulic pipes protected by the rear post.



**Flexible seal** in a rail along the entire height of the door (watertight without grain chute).



**1 or 2 grain hatch(es)** with pre-equipment for removable chute.



**Bogie suspension with parabolic leaves** (on models from 5300D to 6700D): for improved crossing capacity and load distribution.



**Tandem or tridem suspension with parabolic spring leaves and rods** (on models from 7300D to 8500T) for both road and agricultural use.



**Galvanised rear bumper** with adjustable height and depth.

**leboulch**

# PROFESSIONAL TIPPING TRAILER FOR EVERYONE!





# GOLD XL

- ✓ Single or double axle
- ✓ 16 to 24 t
- ✓ Sturdy and reliable

# GOLD XXL

- ✓ Double or triple axle
- ✓ 19 to 32 t
- ✓ High resistance to intensive use

XL 4700S



XXL 5300D



XXL 5800D




XL 5300S



XXL 6200D



XXL 6700D

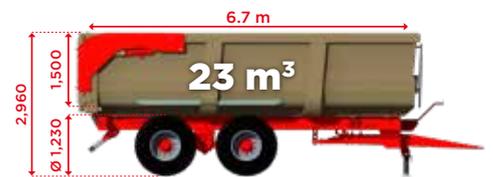

XL 5300D



XXL 7300D




XL 5800D



XXL 7900T



XL 6200D

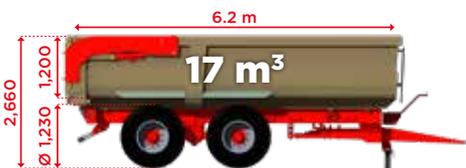


XXL 8500T



## OPTIONS

**300 mm** (steel or aluminium), **500 mm** (aluminium) or **700 mm** (aluminium) extensions, stackable up to 1 m.  
2-part side extensions on single- and double-axle models, and 3-part extensions on triple-axle models.



**Rolling cover**





# GOLIATH

evolution




**Composting canopy**

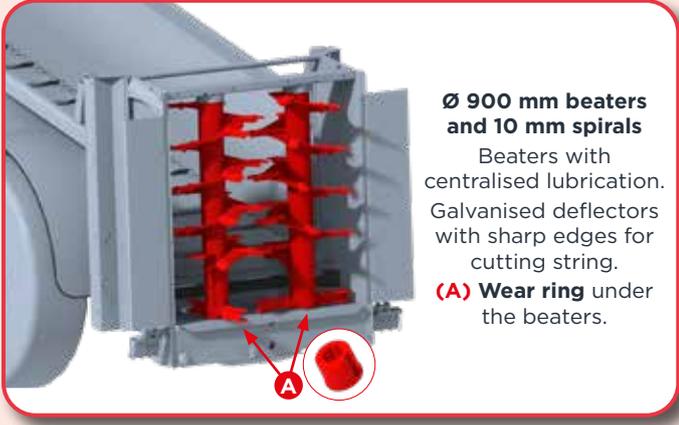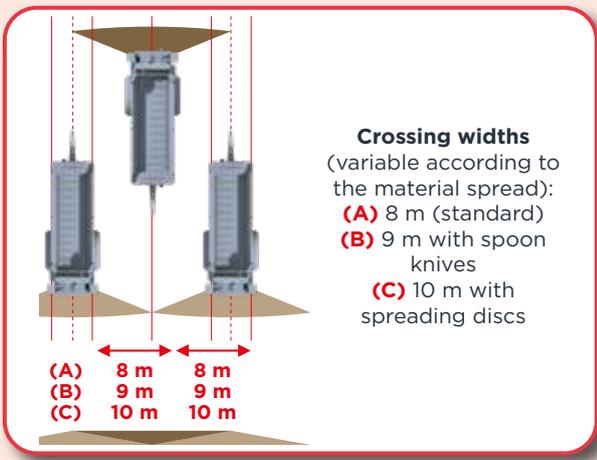



Reversible, interchangeable blades in HARDOX 450

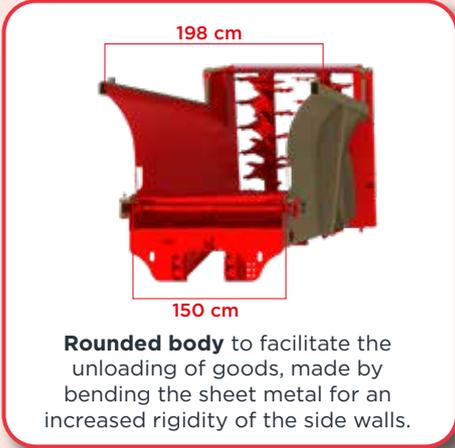

Rounded body to facilitate the unloading of goods, made by bending the sheet metal for an increased rigidity of the side walls.



Ferti-CONTROL 320



Easy-CONTROL (simplified DPA)




ISOBUS  
iso-CONTROL (precision DPA)

DPA (proportional flow): automatic regulation of the moving floor speed according to the door opening and driving speed.




Digital work counter

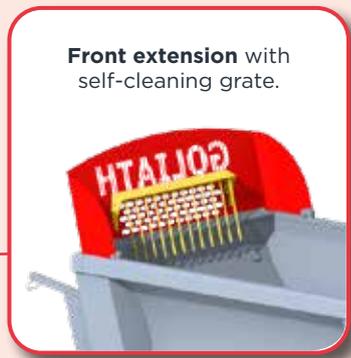

Front extension with self-cleaning grate.




Hydraulic installation with electric control, 140 l tank and electrohydraulic system protected under the hood.

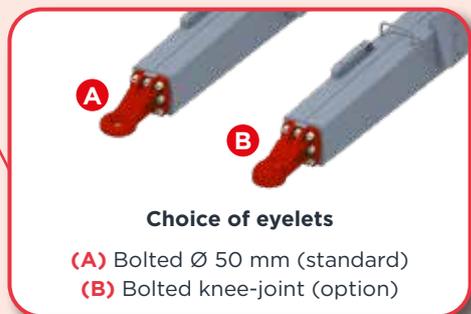

Choice of eyelets

- (A) Bolted Ø 50 mm (standard)
- (B) Bolted knee-joint (option)

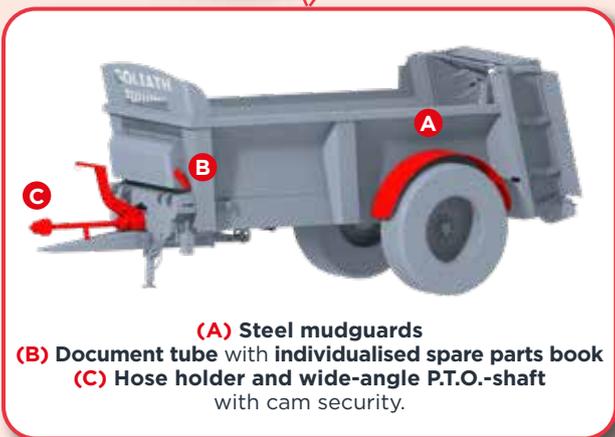



- (A) Steel mudguards
- (B) Document tube with individualised spare parts book
- (C) Hose holder and wide-angle P.T.O.-shaft with cam security.





Hydraulic moving floor tensioner with automatic tensioning safety device.



# HVS evolution

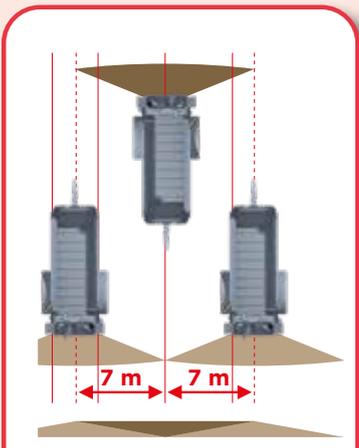


**Crossing widths** (variable according to the material spread): 7 m (standard) or 8 m with spoon knives.

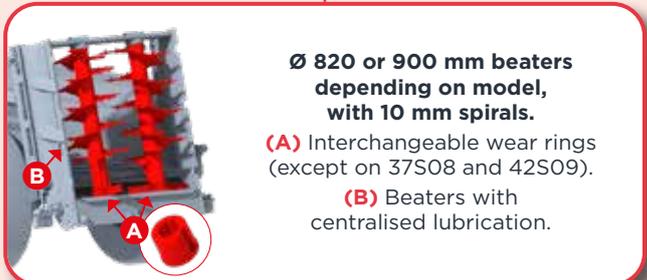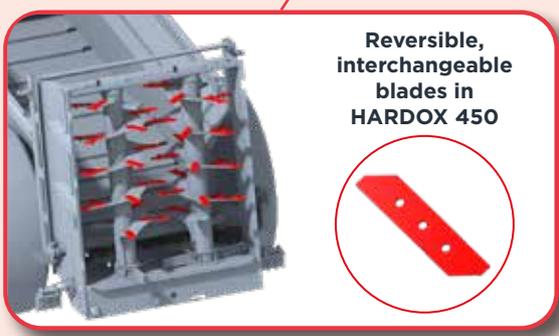



**Guillotine door**  
(standard pre-equipment)

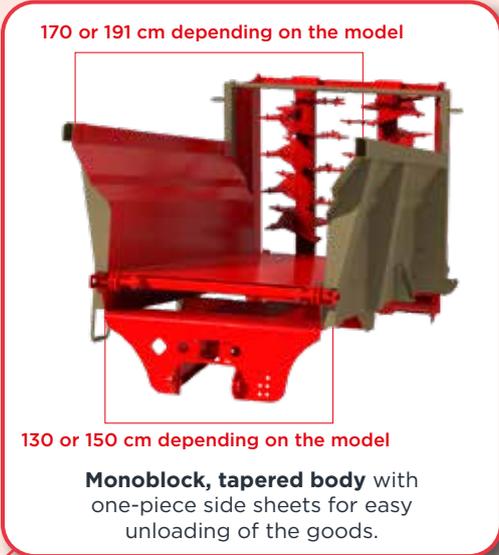

170 or 191 cm depending on the model

130 or 150 cm depending on the model

**Monoblock, tapered body** with one-piece side sheets for easy unloading of the goods.



**Ferti-CONTROL 320**

---



**Easy-CONTROL (simplified DPA)**

---




**ISO-CONTROL (precision DPA)**

---

**DPA (proportional flow):**  
automatic regulation of the moving floor speed according to the door opening and driving speed.



**Front extension** with self-cleaning grate.

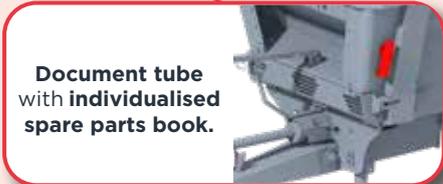

**Document tube** with individualised spare parts book.



**Drive line with transmission under the lowered axle** (ideal for sloping terrain).  
Wear rings on rear bearings.  
Free wheel clutch on rear universal joint.  
Sealing flaps at the front and on the spreading table.



**Tubular slats welded to shipping chains 14** (to avoid material storage) + mechanically welded gearwheels.



**leboulch**

**GOLIATH**  
evolution

**PROFESSIONAL  
MUCK SPREADER FOR  
CONTRACTORS**



**HVS**  
evolution






**ALL-TERRAIN  
MOUNTAIN-TYPE  
MUCK SPREADER**









# GOLIATH evolution

- ✓ A muck spreader that nothing stops!
- ✓ Designed to withstand the toughest working conditions over time

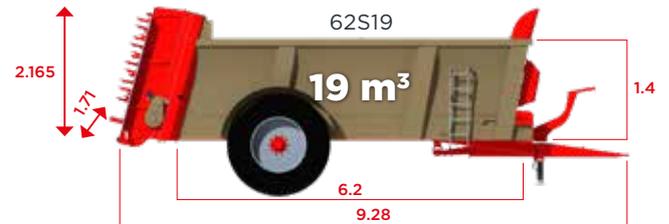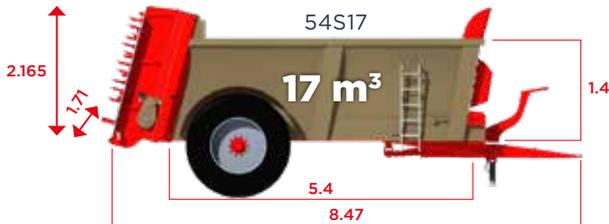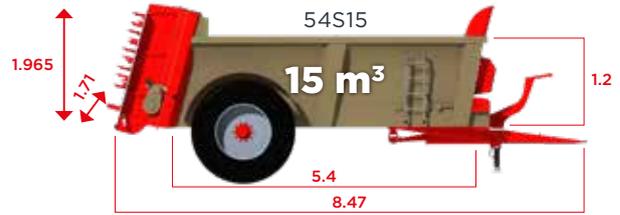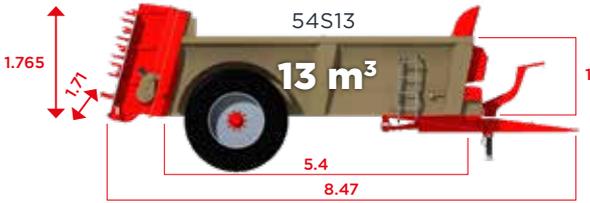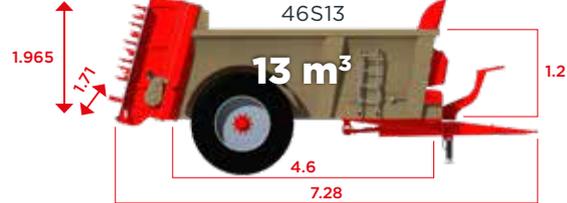

# HVS evolution

- ✓ For small and medium-sized businesses
- ✓ Lowered body for excellent stability and grip on slopes
- ✓ Excellent price-quality ratio!

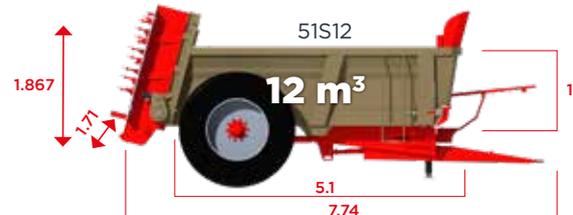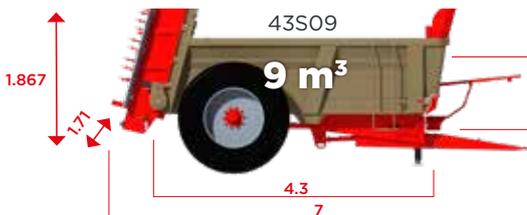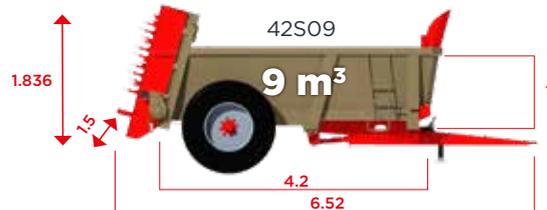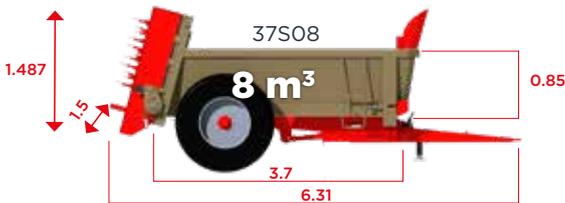

The above dimensions are given in meters (m).



## Active in Spreading for Over 100 Years

# GOLIATH

evolution

# HVS

evolution



# leboulch

JLB le Boulch

Route de Guernanville, 27330 La Vieille-Lyre (France)

Tel.: +32 4 377 35 45 • E-mail: [info@leboulch.com](mailto:info@leboulch.com)

[www.leboulch.com](http://www.leboulch.com)

Discover our machines in action on YouTube 

