







# GOLD




Folding aluminium ladder, galvanised side mudguards and pre-equipment for optional equipment (side bumper and thermoplastic mudguards).



### **Document tube**

with individualised parts book and user manual.

Sturdy
300 x 100 x 10 mm
tubular chassis
stringer for the entire
range, except for 4700S, 5300S and
5300D (300 x 100 x 8 mm).



### Choice of eyelets

(A) Bolted Ø 50 mm (standard)(B) Bolted knee-joint (option)



### Hydraulic folding parking stand attached directly to the trailer


attached directly to the trailer chassis to free the drawbar and facilitate turning.




extensi

**Noise-reducing silentblock** for centering and lateral locking of the body on the chassis.






**Tapered body** (2.25 m at the front and 2.3 m at the rear), wider at the bottom than at the top to facilitate unloading.



High-clearance rear door with hydraulic opening for easy unloading of silage with extensions and to avoid scraping the pile when tipping at the highest.



**Door opening cylinders** protected by the door arms and upper body edge strip.

Double door closing safety system: hydraulic with check valve and mechanical with 2 adjustable hooks. Hydraulic pipes protected by the rear post.

GTRAILER ACTION
GTRAILER ACTION
GRESORIES
GREATAIL
GREATA

Flexible seal in a rail along the entire height of the door (watertight without grain chute).





1 or 2 grain hatch(es) with pre-equipment for removable chute.



Bogie suspension with parabolic leaves (on models from 5300D to 6700D): for improved crossing capacity and load distribution.



Tandem or tridem suspension with parabolic spring leaves and rods (on models from 7300D to 8500T) for both road and agricultural use.



Galvanised rear bumper with adjustable height and depth.











### Consult your dealer for tipping trailer equipment in stock.

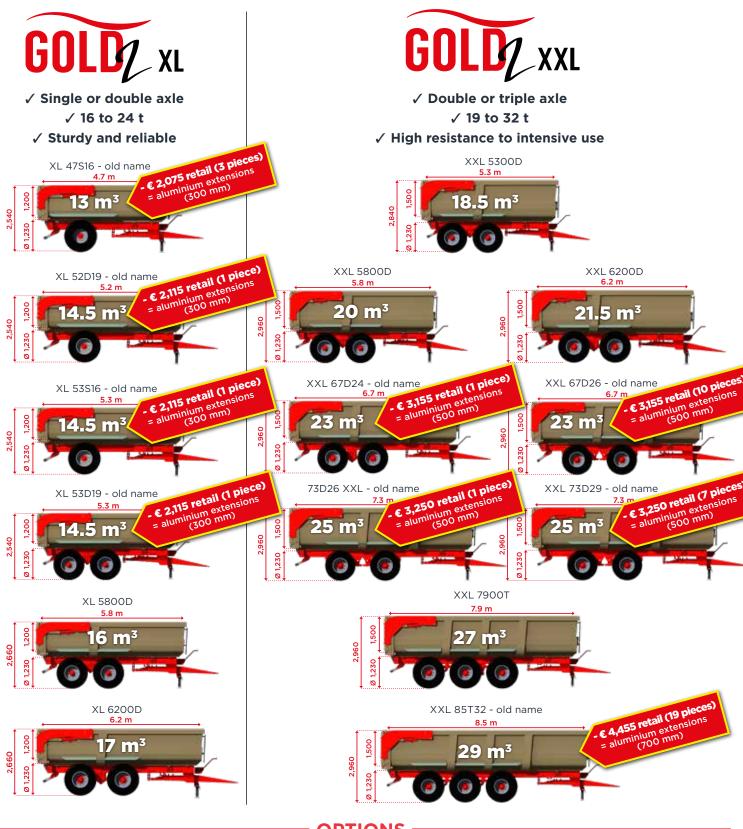

### **OPTIONS**

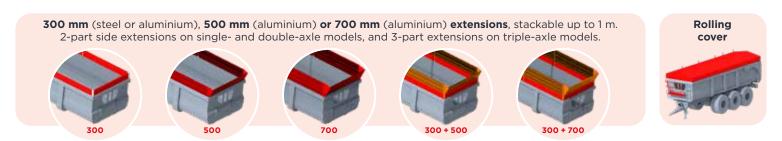


### leboulch)

### GOLIATH evolution




## MUCK SPREADER ACTION MUCK SPREADER ACTION 34 GOLIATH ON CLEARA FREE GUILLOTINE D



### **Crossing widths**


(variable according to the material spread): (A) 8 m (standard) (B) 9 m with spoon knives (C) 10 m with spreading discs




### Ø 900 mm beaters and 10 mm spirals

Beaters with centralised lubrication. Galvanised deflectors with sharp edges for cutting string.

(A) Wear ring under the beaters.



Removable blades on wear ring for improved crumbling.



Beater cover for road travel.















- (A) Double-door canopy
- (B) Ladder to see inside the trailer




Crossing widths (variable according to the material spread): 7 m (standard) or 8 m with spoon knives.





Reversible, interchangeable blades in HARDOX 450





Ø 820 or 900 mm beaters depending on model, with 10 mm spirals.

(A) Interchangeable wear rings (except on 37S08 and 42S09).

> (B) Beaters with centralised lubrication.









**PROFESSIONAL MUCK SPREADER FOR CONTRACTORS** 




**MOUNTAIN-TYPE MUCK SPREADER** 







### GOLIATH evolution


- ✓ A muck spreader that nothing stops!
- ✓ Designed to withstand the toughest working conditions over time














- √ For small and medium-sized businesses
- ✓ Lowered body for excellent stability and grip on slopes
- ✓ Excellent price-quality ratio!

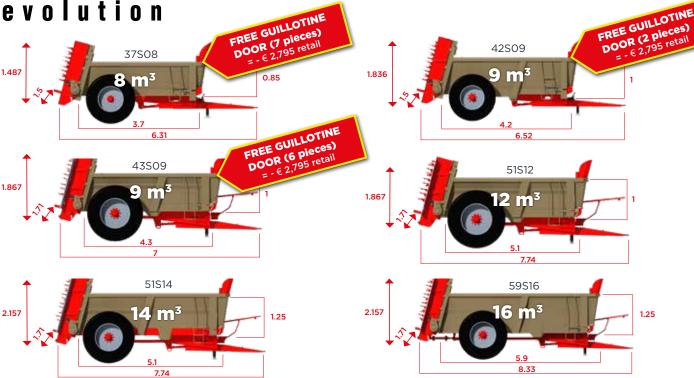

The above dimensions are given in meters (m).



# Active in Spreading for Over 100 Years









### JLB leboulch

Route de Guernanville, 27330 La Vieille-Lyre (France)
Tel.: +32 4 377 35 45 • E-mail: info@leboulch.com
www.leboulch.com

Discover our machines in action on YouTube



