

TECHNICAL FOCUS ON **GOLD2** TIPPING TRAILERS

Technical guide for making the right purchase

XL



XL



XXL



XXL















leeboulch


GOLD2 TIPPING TRAILERS

GOLDEN EQUIPMENT!


Standard ✓ or optional + equipment

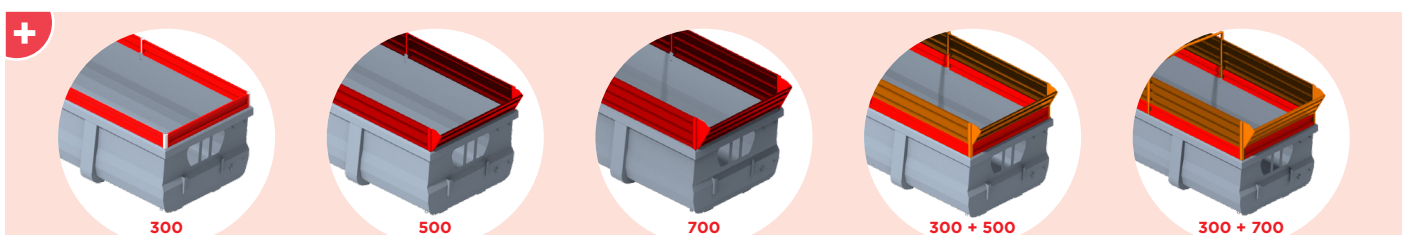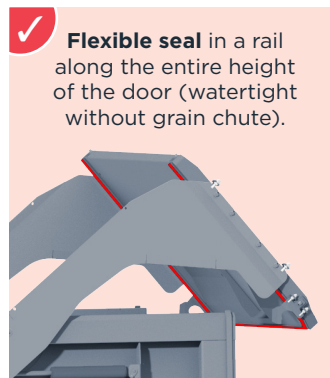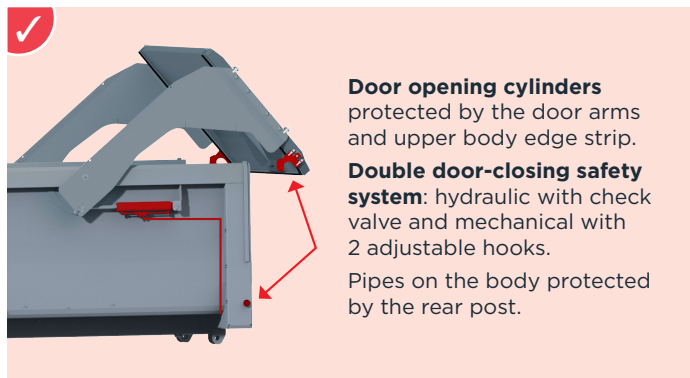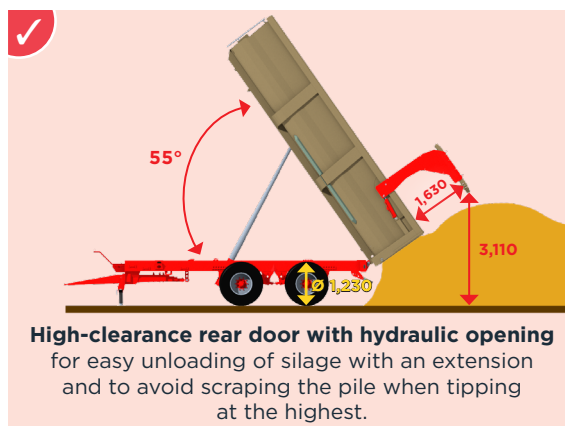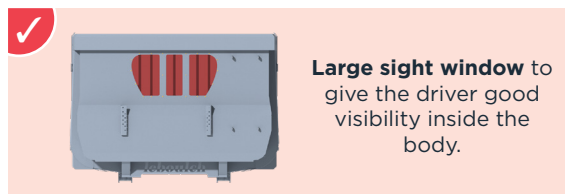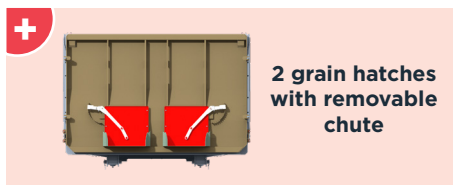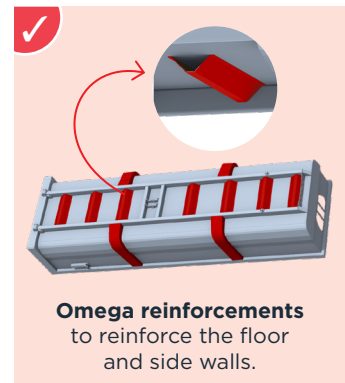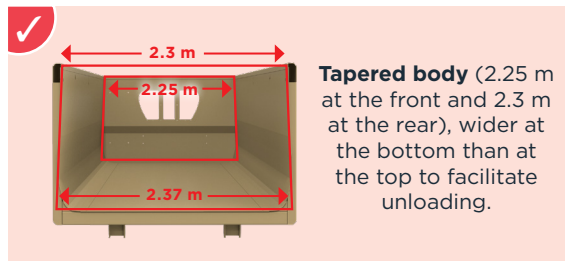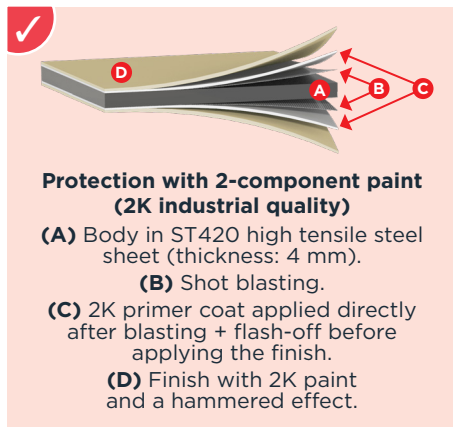


To limit weight and facilitate assembly by a single person: 2-part side extensions on single- and double-axle models, and 3-part extensions on triple-axle models.

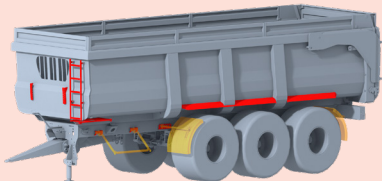


✓ **Ladder, galvanised side mudguards and predispositions for optional equipment** (side bumper and thermoplastic mudguards).




✓ **Sturdy 300 x 100 x 10 mm tubular chassis stringer** for the entire range, except for 4700S, 5300S and 5300D (300 x 100 x 8 mm).

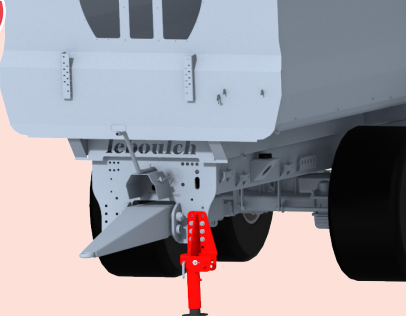


✓ **Hydraulic folding parking stand** attached directly to the trailer chassis to free the drawbar and facilitate turning.




✓ **Narrow drawbar** for improved turning radius with the tractor.




✓ **Choice of eyelets**
(A) Bolted Ø 50 mm (standard)
(B) Bolted knee-joint (option)



✓ **Noise-reducing silentblock** for centering and lateral locking of the body on the chassis.




✓ **Drawbar suspension** with adjustable longitudinal spring leaves (3 positions).




✓ **Galvanised rear bumper** with adjustable height and depth.




✓ **Bogie suspension with parabolic leaves** (on models from 5300D to 6700D): large wheel travel for improved crossing capacity and load distribution.

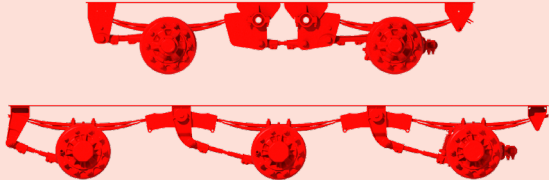

✓ **Tandem or tridem with rods** (on models from 7300D to 8500T) for both road and agricultural use.



✓ **Free-steering axle** with hydraulic locking for reversing (on tridem, also available on front axle).



✓ **Self-steering axle** when reversing and driving forward (on tridem, also available on front axle).




✓ **Large choice of tyres**

- Ø 1,172 to 1,450 mm
- Width: 542 to 660 mm
- Tyres from top brands


BKT **ALLIANCE**
MICHELIN **Mitas**

560/60R22.5 580/65R22.5
600/55R26.5 650/55R26.5


And many more!

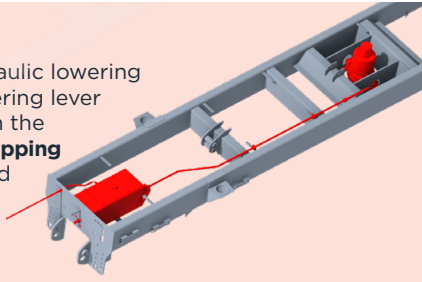


✓ **Compressor** with hydraulic lowering control (+ manual lowering lever to lower the body from the ground) or **combined tipping system** (P.T.O.-shaft and direct connection to the tractor).

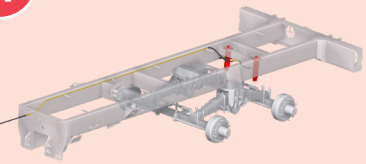


✓ **Load transfer** to avoid shocks and ensure a perfect stability during tipping.
Indexing option: automatic load transfer during tipping.




✓ **(A) Side marker lights**
(B) End outline marker lamps




✓ **(A) LED flashing beacon** (standard)
(B) Working light (option)




✓ **Air brakes** 




✓ **Hydraulic brakes** 



✓ **Dual brakes** (hydraulic and air brakes) 



✓ **Document tube** with individualised parts book and user manual.



✓ **Rolling cover**

WIDE RANGE OF GOLD2 TIPPING TRAILERS

GOLD2 XL

- ✓ Single or double axle
- ✓ 16 to 24 tons
- ✓ Body height: 1.2 m
- ✓ Sturdy and reliable

GOLD2 XXL

- ✓ Double or triple axle
- ✓ 19 to 32 tons
- ✓ Body height: 1.5 m
- ✓ High resistance to intensive use



Understand the model names:

- The figures correspond to the length of the body (in mm).
 - The letter indicates the number of axles: S = single axle, D = two axles, T = three axles.
- Example: model 5300D is a tipping trailer with a body length of 5.3 m and two axles.

leboulch

Leboulch

Route de Guernanville, 27330 La Vieille-Lyre (France)

Tel.: +32 4 377 35 45

E-mail: info@leboulch.com

www.leboulch.com