

TECHNICAL FOCUS ON HVS MUCK SPREADERS

Technical guide for making the right purchase




Lebowitch

HVS MUCK SPREADERS

ALL-TERRAIN, LOWERED “MOUNTAIN”-TYPE MACHINES

Standard ✓ or optional equipment +

✓ 170 or 191 cm depending on the model



130 or 150 cm depending on the model

Monoblock, tapered body with one-piece side sheets for easy unloading of the goods.

✓ **Headboard** with self-cleaning grate.



✓ **Protection with 2-component paint (2K industrial quality)**


(A) Body in ST420 high tensile steel sheet (thickness: 4 mm).
(B) Shot blasting.
(C) 2K primer coat applied directly after blasting + flash-off before applying the finish.
(D) Finish with 2K paint and a hammered effect.



+ **Hydraulic installation** with electric control. 120 l tank on HVS 37S08 and 42S09, 140 l tank on other models.



✓ **Electrohydraulic system** protected under the body.



✓ **Document tube** with individualised spare parts book.




+ **Wheel chocks**



+ **Choice of eyelets**

(A) Bolted Ø 50 mm (standard)
(B) Bolted knee-joint (option)



+ **Large choice of tyres**

- Ø 1,550 to 2,060 mm
- Width: 467 to 680 mm
- Tyres from top brands **BKT** **ALLIANCE** **Mitas**




460/85R34 520/85R38 580/70R38 620/75R26 650/85R38

And many more!


✓ **Hydraulic parking stand** with hand pump.




+ **Sprung drawbar with height adjustment** (except on models 37S08 and 42S09).

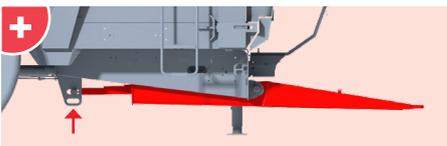


✓ **Air brakes** 

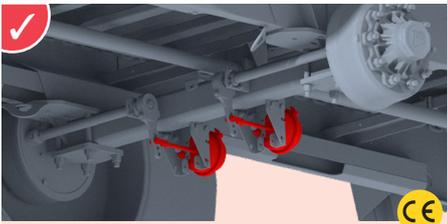


+ **Hydraulic brakes** 

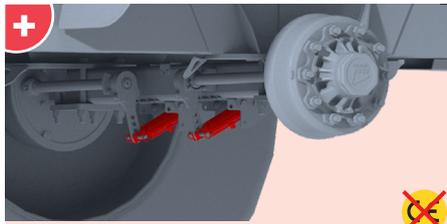

+ **Dual brakes** (hydraulic and air brakes) 











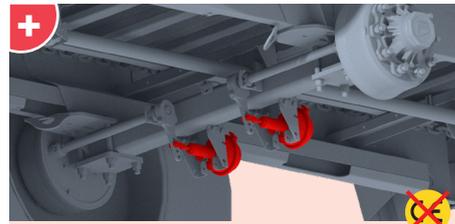


✓ **Drive line with transmission under the lowered axle** (ideal for sloping terrain).
Wear rings on rear bearings.
Free wheel clutch on rear universal joint.
Sealing flaps at the front and on the spreading table.

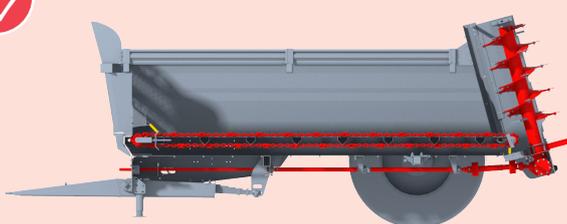

✓ **Wide-angle P.T.O.-shaft** with cam security and **hose holder** with adjustable length and angle.



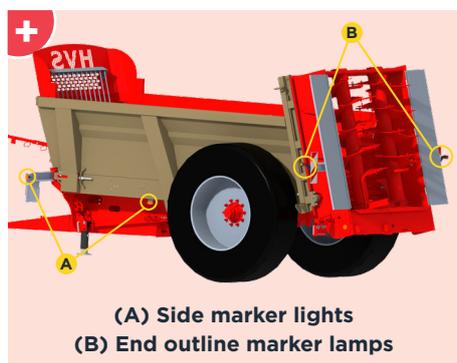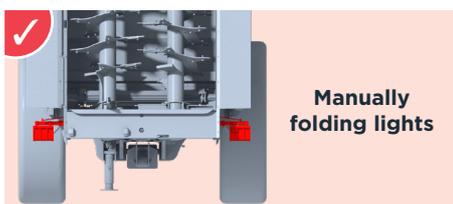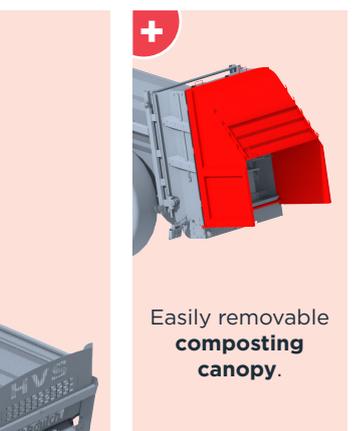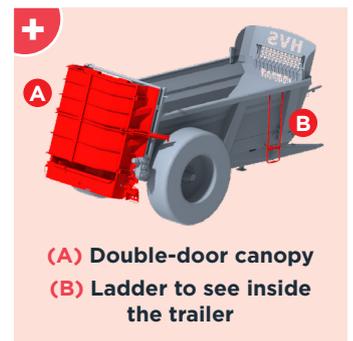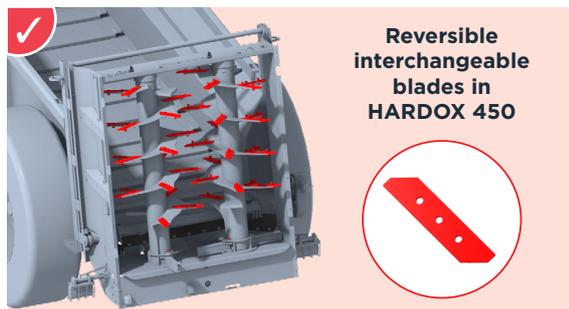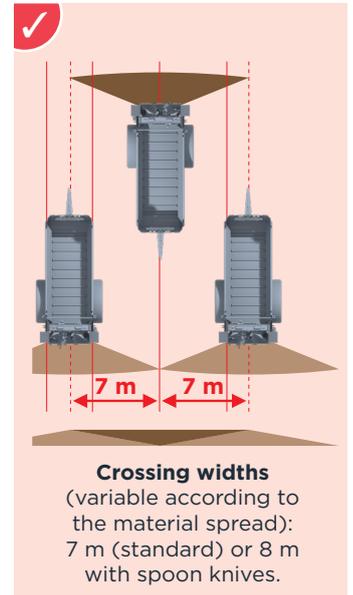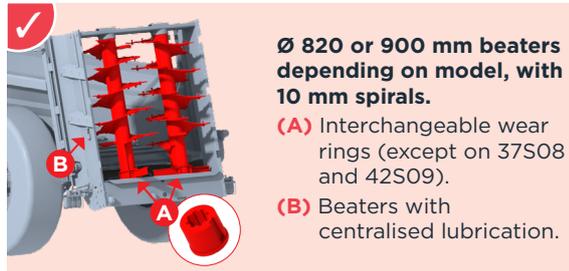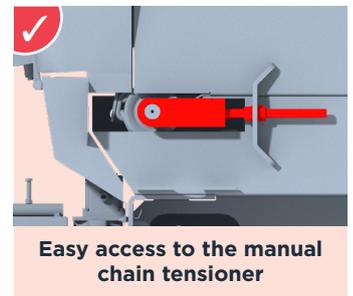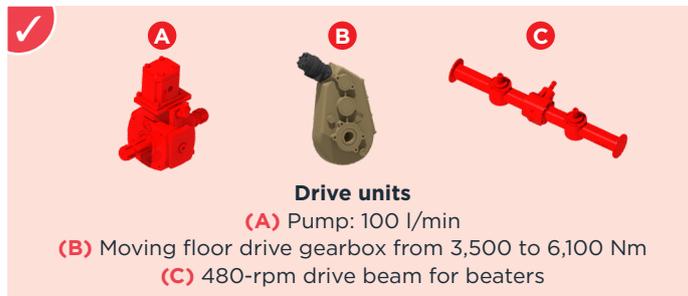

HVS MUCK SPREADERS


ALL MODELS

HVS

evolution

- ✓ Single axle from 7.8 to 17.44 m³
- ✓ Lowered body for excellent stability and grip on slopes
- ✓ Balanced Leboulch beaters with spirals
- ✓ Removable blades

The dimensions below are given in meters (m).

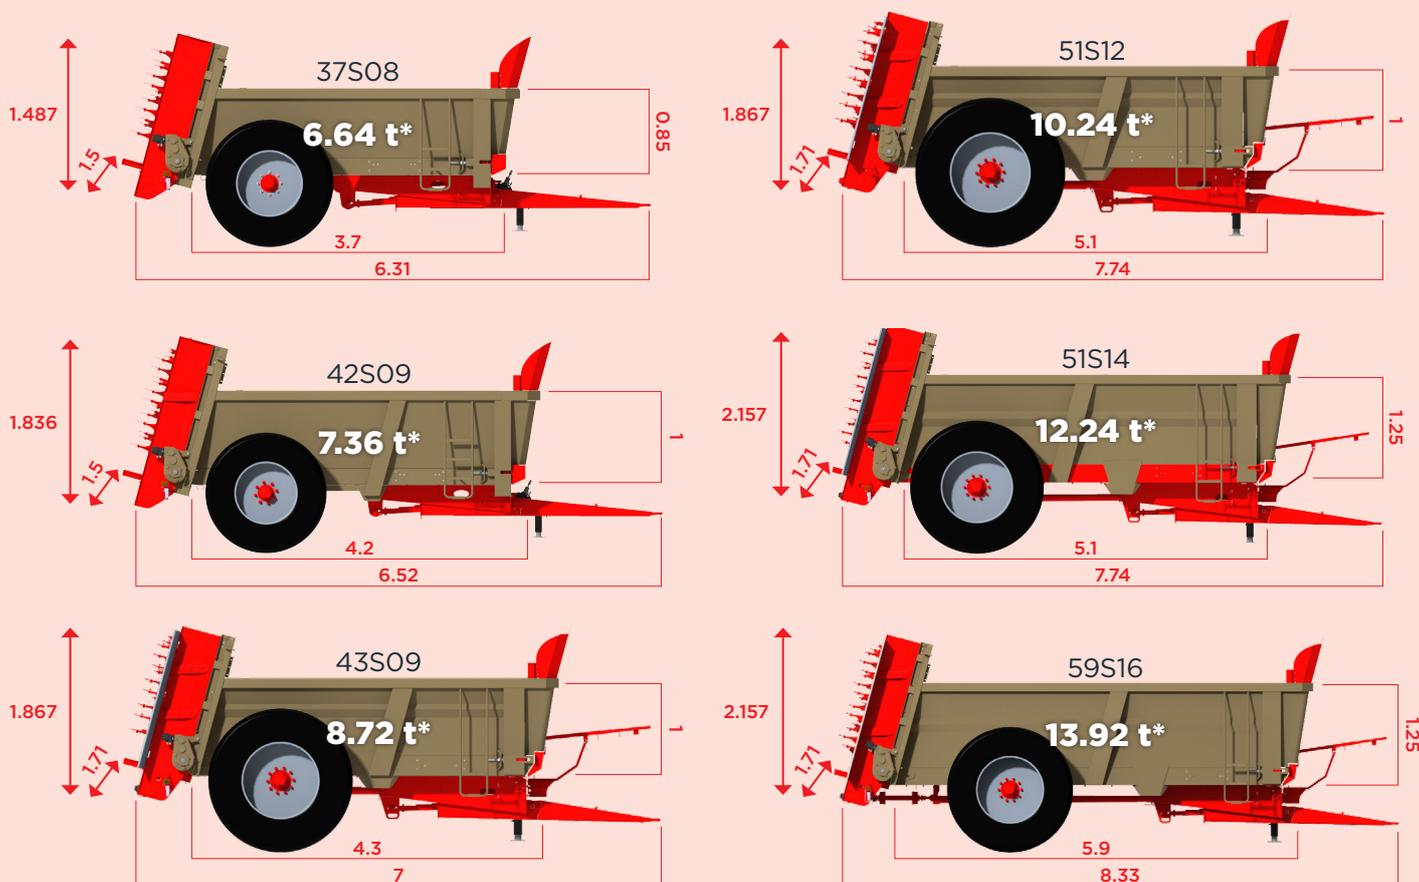

*Capacity (in t) for manure with a density of 0.8 t/m³.

Understand the model names:

- The first 2 digits correspond to the body length up to the door (in dm).
 - The letter indicates the number of axles: S = single axle.
- The last 2 digits indicate the volume of manure (in m³ without extensions).

Example: the model 37S08 corresponds to a muck spreader with a body length of 3.7 m up to the door, one axle and a volume of around 8 m³ without extensions.

leboulch

JLB leboulch

Route de Guernanville, 27330 La Vieille-Lyre (France)

Tel.: +33 2 32 30 67 47

E-mail: info@leboulch.com

www.leboulch.com

