TECHNICAL FOCUS ON THE

GALION

Technical Guide for Bale Trailers




leboulch


GALION

A BALE TRAILER TAKING ACTION

Standard ✓ or Optional + Equipment

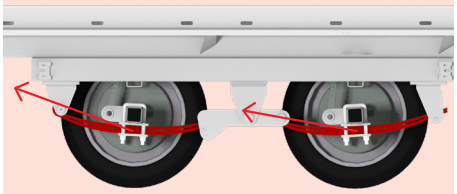


Suspension leaves under the axles to limit the trailer height and facilitate traction.

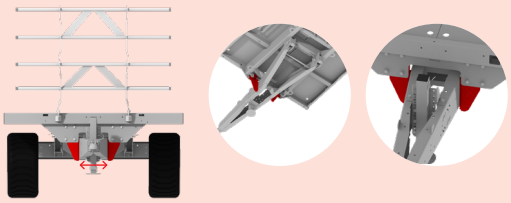


SEMI-MOUNTED

Narrow drawbar with central parking stand.
Sprung drawbar with height adjustment.
Adjustable rail with self-lubricating ertalon for drawbar suspension.

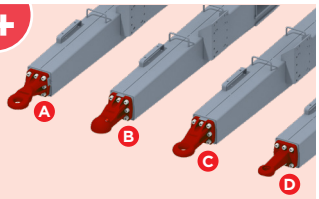


Wide choice of bolted eyelets on semi-mounted models

(A) Ø 50 mm swivel eye
(B) Ø 80 mm knee-joint eyelet
(C) Ø 50 mm fixed eyelet (standard)
(D) Ø 40 mm fixed eyelet

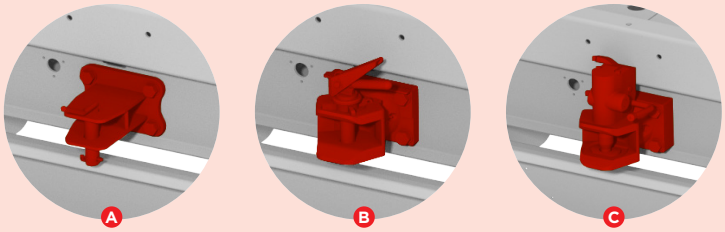

Various rear hitches to hitch a second bale trailer/low loader

(A) Fixed rear hitch with or without electrical plug.
(B) Rear swivel hitch with or without electrical plug.
(C) Automatic rear swivel hitch with or without electrical plug.

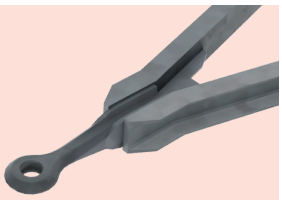


Welded Ø 40 mm flat eye on trailed models

Large choice of tyres
• Ø 844 to 1,247 mm
• Width: 297 to 611 mm




455/40R22.5 *560/45R22,5* *385/65R22.5* *445/45R19.5* *560/60R22.5* *560/60R22.5*

And many more!

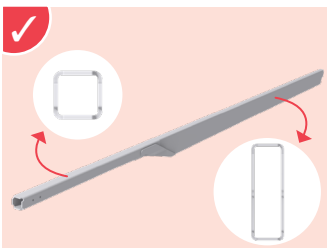


Oversized tubular reinforcement of the chassis on trailed Galion.


Air brakes

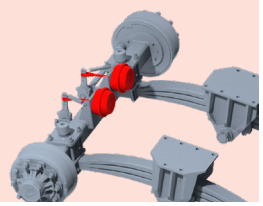


Dual-line hydraulic brakes

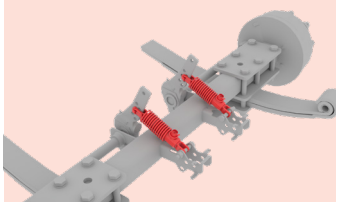

Dual brakes (hydraulic and air brakes)

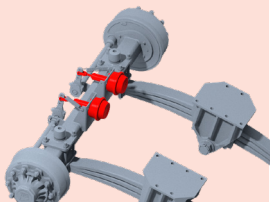




Air brakes proportional to the load




Thermoplastic mudguards




Wheel chocks




Document tube




Polyethylene box 600 x 480 x 400 mm.

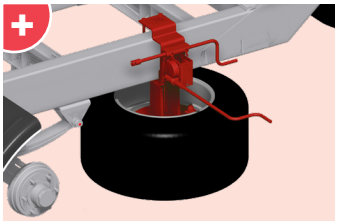

Spare wheel with winch

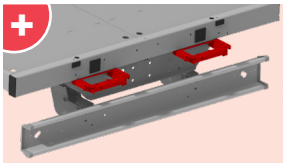


2 strap tensioners at the back possible.

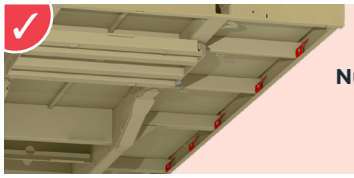


Numerous lashing points




Profile of outer stringer

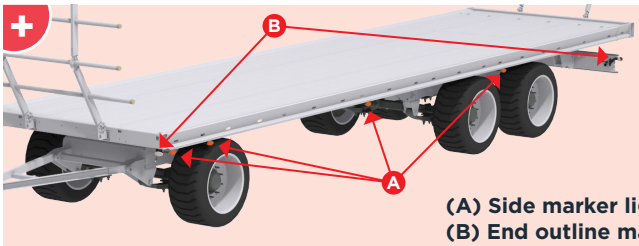


(A) Side marker lights
(B) End outline marker lamps

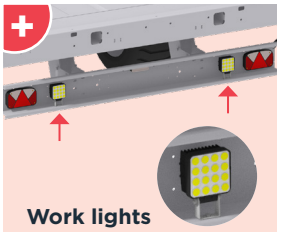

Work lights or reversing lights

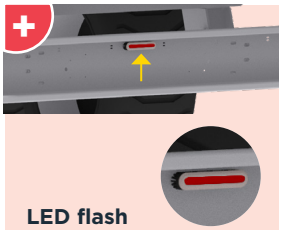

LED flash bar (flashing beacon function)

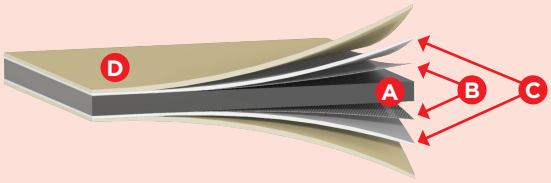

Protection with 2-component paint (2K industrial quality)


(A) Floor in chequered plate with a 2.5 cm edge to better hold the load.

(B) Automatic shot-blasting with 20 turbines (2,300 kg shot/min).

(C) 2K primer coat applied directly after blasting + flash-off before applying the finish.

(D) Finish with 2K paint and hammered effect.


LADDERS AND EXTENSIONS FOR A SAFE TRANSPORT

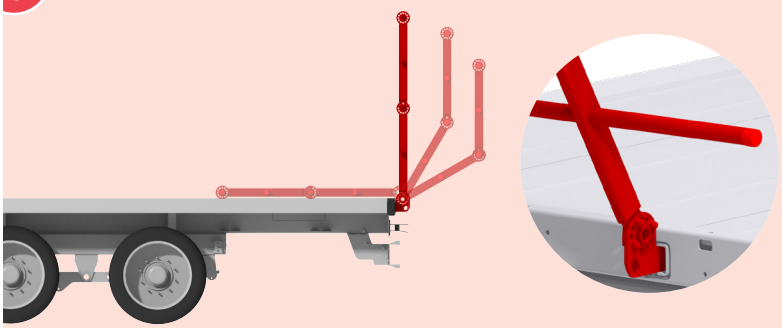


Removable, multiposition **front and rear ladders**.




Retractable side ladders with front and rear brackets that reduce the useful length by 114 mm (available only on 8-m and 10-m models).

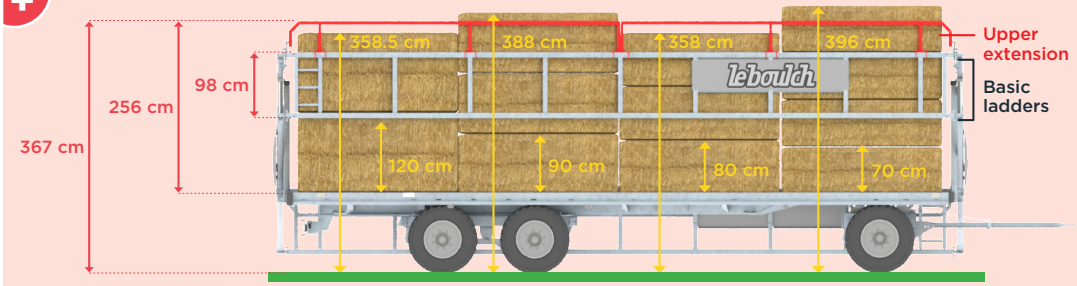

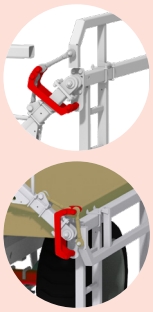

Approximate total heights, which can vary according to the wheel type.

Self-unfolding extensions for side ladders to automatically secure the upper bales whatever their height (70 to 120 cm) • Patented system.

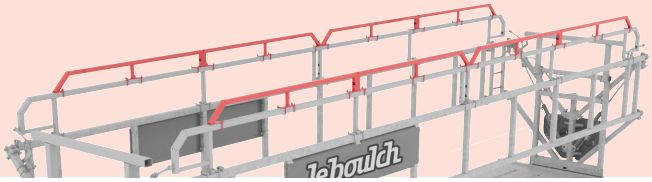

Extensions (height: 20 cm) bolted onto the self-deploying extensions for side ladders.

WIDE RANGE OF
GALION BALE TRAILERS

Trailed Galion

GTP80D10



GTP80D14



GTP100D14



GTP100T21



GTP117T21 ~~CE~~



Semi-Mounted Galion

GSP60S07



GSP80D14



GSP100D14



GSP100T24



GSP117T24 ~~CE~~



BALE TRAILERS

- ✓ **Range from 6 to 11.7 m**
- ✓ **Trailed or semi-mounted models**
- ✓ **Paint protection with hammered effect**
- ✓ **Front/rear ladders or retractable side ladders**

Understand the model names:

- The first character refers to the model (G: Galion).
- The second one indicates the type of trailer (T: trailed, S: semi-mounted).
- The third one refers to the protection (P: paint).
- The following digit indicates the total length of the platform (in dm).
- The next character indicates the number of axles: S = single axle, D = two axles, T = three axles.
- The last two digits to the technically permissible load (in t).

Example: the GSP60S07 model is a painted semi-mounted Galion with a 6-m long platform, a technically permissible load of 7 t and one axle.

Leboulch
Route de Guernanville, 27330 La Vieille-Lyre (France)
Tel.: +32 4 377 35 45
E-mail: info@leboulch.com
www.leboulch.com

November 2026. Non-contractual document. Data can be modified without prior notice. Pictures do not necessary correspond to the standard equipment.