


ADGO62S19/2-26

ADVANTAGE GOLIATH 62S19

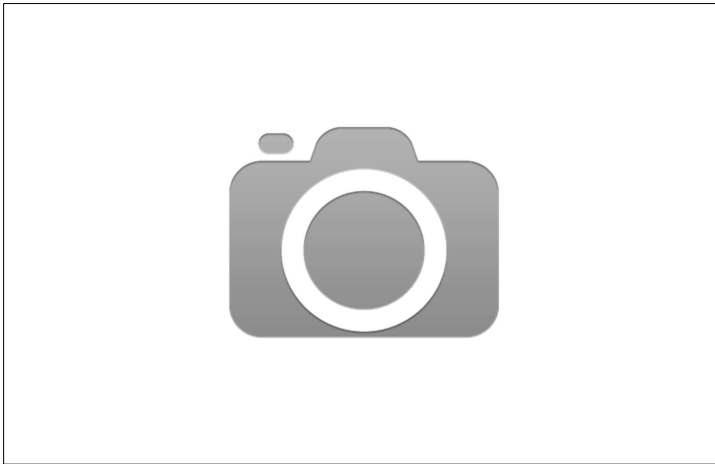

- **Narrow monocoque body**
- **Sprung drawbar**
- **Wheels 710/70R38**
- **Air brakes**
- **Ø 900 mm vertical beaters with Hardox knives**
- **Guillotine door**
- **Ferti-CONTROL 320 control box**
- **European certification for 30 km/h**

Standard equipment

- | | |
|---|---|
| <ul style="list-style-type: none"> ✓ Monocoque body with monoblock rounded side walls ✓ Manufactured according to EN 690 standard ✓ 2 vertical beaters with removable coupling and balanced spirals (Ø 900 mm) with retractable hammers on wear rings (spiral thickness: 10 mm) ✓ Reversible, interchangeable HARDOX blades (thickness: 10 mm) ✓ 1,000-rpm drive shaft - beater rotation speed: 430 rpm ✓ Bolted rectangular moving floor slats (80 x 40 mm) ✓ Hydraulic tensioning of the moving floor with under-tension security and RE mode locking ✓ Moving floor drive via tractor hydraulics, manual flow adjustment ✓ Reinforced single-speed reduction gearbox of moving floor ✓ Mechanically welded steel gearwheels ✓ Protected P.T.O. and drive shaft ✓ Homocinetic transmission (cam security) | <ul style="list-style-type: none"> ✓ Free wheel on the spreading system ✓ Reversing camera with 7" LCD colour screen ✓ Anti-projection front cover ✓ Galvanised side boards ✓ Sealing flap at the front and on the spreading table ✓ LED flash bar connected to lighting ✓ Removable mudguards ✓ Dual-line air brakes ✓ Sprung drawbar ✓ Ø 50 mm bolted flat eyelet ✓ Hydraulic parking stand ✓ Moving floor with 2 shipping chains (Ø 16 mm links - 32 t per link) |
|---|---|

Specific equipment ADGO62S19/2-26

- **L-GO62S19-26** GOLIATH 62S19 muck spreader
- **KHEU30-10S** European certification for 10 T maximum permissible weight on the axle (+ 3 T on the eyelet) at 30 km/h for single-axle vehicle (cat. S)
- **2464** ADR axle 150-10G with 420 x 180 mm brakes for single-axle vehicle instead of ADR 130-10G 406 x 120 mm
- **5604** Wheels 710/70R38 (BKT) VF Agrimax-V-Flecto 181 D (Ø 1.961 x 715 mm, 8.250 kg per wheel at 40 km/h and 2 bar) instead of 400R22.5
- **3153** Air brakes with spring-brake actuator instead of standard parking brake (air brakes compulsory)
- **1526** LED side marker lights
- **L932176** Guillotine door for 54S17 and 62S19
- **5842** Ferti-CONTROL 320 control box - including electric moving floor control with flow regulator, moving floor on/off switch, moving floor reverser (by reversing the hydraulic selector switch in the tractor cabin) and electric pre-equipment for work light and flashing beacon control

	Total £	Discount %	NET
RETAIL	59.206 £
TOTAL		